


Datasheet : 101

NOTE: European specification standard is 316 stainless steel for gland body

PG SERIES ■ SINGLE ELEMENT SEALING

Conax Technologies Model PG Packing Glands provide pressure/vacuum sealing for tubes, probes, pipe, cable or any single element assembly (not electrically isolating), including thermocouples, RTDs, thermometers, thermistor probes, capillary tubes, tubewells, multi-pair cables and analyzer sample tubes. PG glands seal against gases and liquids and resist element movement under pressure.

PG gland bodies with NPT threads or SAE threads are constructed from 303SST standard. Weld-neck style gland bodies are constructed from 316LSST standard. Caps and followers for all styles are constructed from 303SST standard. Many optional materials are also available, including 316LSST, Monel 405, Hastelloy C276, Inconel and more. For information on alternative materials, see page 9. Cap Style A offers a mounting thread only. Cap Style B provides threading on both ends for attachment to conduit or terminal heads.

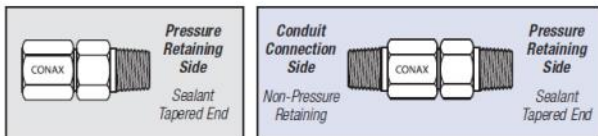

Type A has mounting thread only.

Type B has cap end threaded. B Cap NPT matches the standard mounting NPT.

Alternative sealant materials and custom bore sizes are available. Please consult a Conax Technologies sales engineer for custom needs.

- Temperature Range: -400° F to +1600° F (-240° C to +870° C), depending on sealant used. See page 8 for details.
- Pressure Range: Vacuum to 10,000 PSIG (690 bar) – see Pressure Ratings in Specifications Chart.

Accessories


The replaceable sealant permits repeated use of the same fitting. Assembly is simple and may be done in the field. Simply insert the element and torque the cap. To replace the sealant and/or element, simply loosen the cap, replace the necessary items, relubricate and retorque the cap.

Glands are supplied factory lubricated. When reused, the glands should be relubricated to maintain published torque and pressure ratings. If glands are cleaned prior to assembly, they should be relubricated. On weld mount models, the heat from the welding process will destroy the lubricant. These models must also be relubricated prior to use. See page 103 for information on our lubrication kit.

To order Replacement Sealant, order RS - (Gland) - (Diameter) - (Sealant)


Example: RS-MPG-125-V

Catalog Numbering System

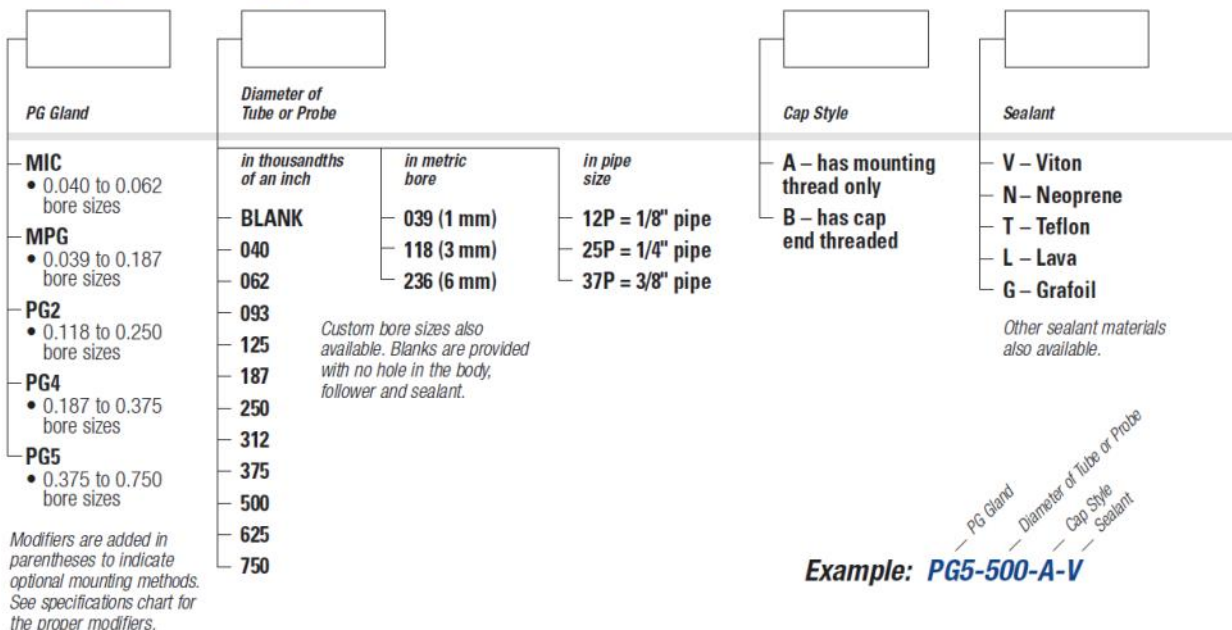

Note: These glands are available with flanges. See pages 80-101 for flange options.

Datasheet : 101

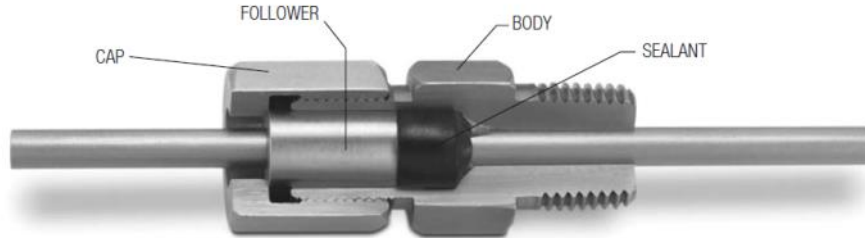

PG Selection Guide

Model	NPT Size*	Bore Diameter																		
		BLANK	039	040	062	093	118	125	187	236	250	312	375	12P	500	25P	625	37P	750	
MIC	1/16			X	X															
MPG	1/8	X	X	X	X	X	X	X												
PG2	1/4	X					X	X	X	X										
PG4	1/2	X							X	X	X	X	X	X						
PG5	3/4	X												X	X	X	X	X	X	X

*These are the standard mounting ports for these models. Optional reduced mounting ports may also be available. See the Specifications Charts on the subsequent pages for details.




Sealant Selection Guide

Material	Temperature Range
Lava (L)	-300° F to +1600° F (-185° C to +870° C)
Teflon (T)	-300° F to +450° F (-185° C to +232° C)
Neoprene (N)	-40° F to +200° F (-40° C to +93° C)
Viton (V)	-10° F to +450° F (-23° C to +232° C)
Grafoil (G)	-400° F to +925° F in air, +3000° F in inert or reducing atm. (-240° C to +495° C in air, +1650° C in inert or reducing atm.)



Datasheet : 101

PG SERIES ■ SINGLE ELEMENT SEALING – SPECIFICATIONS

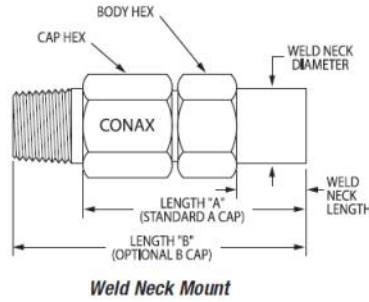

Catalog Number	Tube/Probe Diameter		Length 'A' IN MM	Length 'B' IN MM	Hex Size				Pressure Rating											
	IN	MM			Body	Cap	Body	Cap	Neoprene	Viton		Teflon		Lava		Grafoil				
BORE SIZES 0.040 TO 0.062 - MODEL MIC																				
Standard 1/16 NPT																				
MIC-040	0.040	1.02	0.94	23.8	NA	NA	0.375	0.343	9.5	8.7	NA	NA	NA	NA	3,200	220	8,000	551	NA	NA
MIC-062	0.062	1.57	0.94	23.8	NA	NA	0.375	0.343	9.5	8.7	NA	NA	NA	NA	3,200	220	8,000	551	10,000	689
BORE SIZES 0.039 TO 0.187 - MODEL MPG																				
Standard 1/8 NPT																				
MPG-BLANK	NA	NA	1.19	30.2	1.56	39.7	0.500	0.500	12.7	12.7	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
MPG-039	0.039	0.99	1.19	30.2	1.56	39.7	0.500	0.500	12.7	12.7	2,000	138	1,600	110	1,600	110	2,800	193	1,600	110
MPG-040	0.040	1.02	1.19	30.2	1.56	39.7	0.500	0.500	12.7	12.7	2,000	138	1,600	110	1,600	110	2,800	193	1,600	110
MPG-062	0.062	1.57	1.19	30.2	1.56	39.7	0.500	0.500	12.7	12.7	1,600	110	2,800	193	1,600	110	3,200	220	2,000	138
MPG-093	0.093	2.36	1.19	30.2	1.56	39.7	0.500	0.500	12.7	12.7	1,200	83	1,200	83	800	55	2,000	138	2,400	165
MPG-118	0.118	3.00	1.19	30.2	1.56	39.7	0.500	0.500	12.7	12.7	1,200	83	1,200	83	800	55	2,000	138	2,400	165
MPG-125	0.125	3.18	1.19	30.2	1.56	39.7	0.500	0.500	12.7	12.7	1,200	83	1,200	83	800	55	2,000	138	2,400	165
MPG-187	0.187	4.75	1.19	30.2	1.56	39.7	0.500	0.500	12.7	12.7	1,200	83	1,500	103	1,500	103	2,000	138	800	55
Weld Neck Mount (Weld Neck Length 0.39", Diameter 0.405")**																				
MPG(SWM1/S316L)-BLANK	NA	NA	1.19	30.2	1.56	39.7	0.500	0.500	12.7	12.7	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
MPG(SWM1/S316L)-039	0.039	0.99	1.19	30.2	1.56	39.7	0.500	0.500	12.7	12.7	2,000	138	1,600	110	1,600	110	2,800	193	1,600	110
MPG(SWM1/S316L)-040	0.040	1.02	1.19	30.2	1.56	39.7	0.500	0.500	12.7	12.7	2,000	138	1,600	110	1,600	110	2,800	193	1,600	110
MPG(SWM1/S316L)-062	0.062	1.57	1.19	30.2	1.56	39.7	0.500	0.500	12.7	12.7	1,600	110	2,800	193	1,600	110	3,200	220	2,000	138
MPG(SWM1/S316L)-093	0.093	2.36	1.19	30.2	1.56	39.7	0.500	0.500	12.7	12.7	1,200	83	1,200	83	800	55	2,000	138	2,400	165
MPG(SWM1/S316L)-118	0.118	3.00	1.19	30.2	1.56	39.7	0.500	0.500	12.7	12.7	1,200	83	1,200	83	800	55	2,000	138	2,400	165
MPG(SWM1/S316L)-125	0.125	3.18	1.19	30.2	1.56	39.7	0.500	0.500	12.7	12.7	1,200	83	1,200	83	800	55	2,000	138	2,400	165
MPG(SWM1/S316L)-187	0.187	4.75	1.19	30.2	1.56	39.7	0.500	0.500	12.7	12.7	1,200	83	1,500	103	1,500	103	2,000	138	800	55
SAE 3/8-24 Thread Mount (formerly MS)																				
MPG(MSE3)-BLANK	NA	NA	1.19	30.2	1.56	39.7	0.625	0.500	15.9	12.7	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
MPG(MSE3)-040	0.040	1.02	1.19	30.2	1.56	39.7	0.625	0.500	15.9	12.7	2,000	138	1,600	110	1,600	110	2,800	193	1,600	110
MPG(MSE3)-062	0.062	1.57	1.19	30.2	1.56	39.7	0.625	0.500	15.9	12.7	1,600	110	2,800	193	1,600	110	3,200	220	2,000	138
SAE 7/16-20 Thread Mount (formerly MS)																				
MPG(MSE4)-BLANK	NA	NA	1.25	31.8	1.63	41.3	0.688	0.500	17.5	12.7	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
MPG(MSE4)-093	0.093	2.36	1.25	31.8	1.63	41.3	0.688	0.500	17.5	12.7	1,200	83	1,200	83	800	55	2,000	138	2,400	165
MPG(MSE4)-125	0.125	3.18	1.25	31.8	1.63	41.3	0.688	0.500	17.5	12.7	1,200	83	1,200	83	800	55	2,000	138	2,400	165
SAE 1/2-20 Thread Mount (formerly MS)																				
MPG(MSE5)-BLANK	NA	NA	1.25	31.8	1.63	41.3	0.750	0.500	19.1	12.7	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
MPG(MSE5)-187	0.187	4.75	1.25	31.8	1.63	41.3	0.750	0.500	19.1	12.7	1,200	83	1,500	103	1,500	103	2,000	138	800	55

Note: the pressure and torque ratings provided in this catalog apply only when bores are drilled by Conax Technologies.

* Hex size for the body and cap are the same unless a cap size is provided in parentheses. Blanks are provided with no hole in the body, follower and sealant.

** Weld neck models require lubrication prior to use.

N/O = Not Offered, NA = Not Applicable

Datasheet : 101

SINGLE ELEMENT SEALING – SPECIFICATIONS ■ PG SERIES

Catalog Number	Tube/Probe Diameter		Length 'A'		Length 'B'		Hex Size				Pressure Rating										
	IN	MM	IN	MM	IN	MM	Body IN	Cap IN	Body MM	Cap MM	Neoprene		Viton		Teflon		Lava		Grafoil		
BORE SIZES 0.118 TO 0.250 - MODEL PG2																					
Standard 1/4 NPT																					
PG2-BLANK	NA	NA	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
PG2-118	0.118	3.00	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	2,800	193	2,800	193	1,600	110	9,000	620	8,000	551	
PG2-125	0.125	3.18	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	2,800	193	2,800	193	1,600	110	9,000	620	8,000	551	
PG2-187	0.187	4.75	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	2,000	138	4,500	310	1,600	110	8,800	606	4,000	276	
PG2-236	0.236	5.99	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	1,800	124	3,000	207	1,200	83	7,500	517	4,000	276	
PG2-250	0.250	6.35	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	1,600	110	2,000	138	800	55	7,500	517	4,000	276	
PG2 with Optional 1/8 NPT																					
PG2(PTM1/-)-118	0.118	3.00	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	2,800	193	2,800	193	1,600	110	9,000	620	8,000	551	
PG2(PTM1/-)-125	0.125	3.18	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	2,800	193	2,800	193	1,600	110	9,000	620	8,000	551	
PG2(PTM1/-)-187	0.187	4.75	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	2,000	138	4,500	310	1,600	110	8,800	606	4,000	276	
PG2(PTM1/-)-236	0.236	5.99	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	1,800	124	3,000	207	1,200	83	7,500	517	4,000	276	
PG2(PTM1/-)-250	0.250	6.35	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	1,600	110	2,000	138	800	55	7,500	517	4,000	276	
PG2 with Optional 3/8 NPT																					
PG2(PTM3/-)-118	0.118	3.00	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	2,800	193	2,800	193	1,600	110	9,000	620	8,000	551	
PG2(PTM3/-)-125	0.125	3.18	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	2,800	193	2,800	193	1,600	110	9,000	620	8,000	551	
PG2(PTM3/-)-187	0.187	4.75	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	2,000	138	4,500	310	1,600	110	8,800	606	4,000	276	
PG2(PTM3/-)-236	0.236	5.99	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	1,800	124	3,000	207	1,200	83	7,500	517	4,000	276	
PG2(PTM3/-)-250	0.250	6.35	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	1,600	110	2,000	138	800	55	7,500	517	4,000	276	
Weld Neck Mount (Weld Neck Length 0.59", Diameter 0.540")**																					
PG2(SWM2/S316L)-BLANK	NA	NA	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
PG2(SWM2/S316L)-118	0.118	3.00	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	2,800	193	2,800	193	1,600	110	9,000	620	8,000	551	
PG2(SWM2/S316L)-125	0.125	3.18	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	2,800	193	2,800	193	1,600	110	9,000	620	8,000	551	
PG2(SWM2/S316L)-187	0.187	4.75	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	2,000	138	4,500	310	1,600	110	8,800	606	4,000	276	
PG2(SWM2/S316L)-236	0.236	5.99	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	1,800	124	3,000	207	1,200	83	7,500	517	4,000	276	
PG2(SWM2/S316L)-250	0.250	6.35	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	1,600	110	2,000	138	800	55	7,500	517	4,000	276	
SAE 7/16-20 Thread Mount (formerly MS)																					
PG2(MSE4/-)-BLANK	NA	NA	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
PG2(MSE4/-)-125	0.125	3.18	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	2,800	193	2,800	193	1,600	110	9,000	620	8,000	551	
SAE 1/2-20 Thread Mount (formerly MS)																					
PG2(MSE5/-)-BLANK	NA	NA	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
PG2(MSE5/-)-187	0.187	4.75	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	2,000	138	4,500	310	1,600	110	8,800	606	4,000	276	
SAE 9/16-18 Thread Mount (formerly MS)																					
PG2(MSE6/-)-BLANK	NA	NA	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
PG2(MSE6/-)-250	0.250	6.35	2.00	50.8	2.63	66.7	0.750	0.750	19.1	19.1	1,600	110	2,000	138	800	55	7,500	517	4,000	276	
BORE SIZES 0.187 TO 0.375 (1/8 PIPE) - MODEL PG4																					
Standard 1/2 NPT																					
PG4-BLANK	NA	NA	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	
PG4-187	0.187	4.75	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,500	103	1,500	103	2,400	165	10,000	689	8,000	551	
PG4-236	0.236	5.99	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,500	103	1,500	103	1,600	110	10,000	689	7,500	517	
PG4-250	0.250	6.35	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,500	103	1,500	103	1,600	110	10,000	689	7,500	517	
PG4-312	0.312	7.92	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,200	83	1,200	83	2,000	138	10,000	689	7,000	482	
PG4-375	0.375	9.53	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,200	83	500	34	1,400	96	7,500	517	4,500	310	
PG4-12P	0.405	10.29	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	




C/F = Consult factory. NA = Not Applicable.

All pressure and torque ratings were determined at 68° F (20° C) using stainless steel rod as the element. Pressure ratings may degrade at higher temperatures. Pressure rating guide values are provided for glands with elements restrained by the compressed sealant. Higher pressure may be attained with additional element restraints. Tolerance of tube or probe diameter is ±0.005 (±0.003 for diameters ≤0.040). Deviation from the nominal may affect pressure ratings. Standard O.D. tolerance of pipe is +0.015"/-0.031". Consult factory for details.

CAUTION: When sealing on soft, fragile or crushable elements, catalog torques may not apply. When catalog torques are applied, compressed sealants generate considerable forces on the element to be sealed. These forces could result in damaging soft or fragile elements such as coax cables or thin-wall materials. Consult factory for these types of applications.

Datasheet : 101

PG SERIES ■ SINGLE ELEMENT SEALING – SPECIFICATIONS

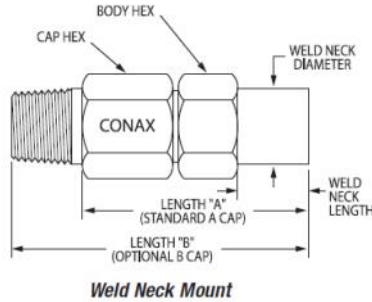

Catalog Number	Tube/Probe Diameter		Length 'A'		Length 'B'		Hex Size			Pressure Rating															
	IN	MM	IN	MM	IN	MM	Body	Cap	Body	Cap	Neoprene	Viton	Teflon	Lava	Grafoil	PSIG	BAR	PSIG	BAR	PSIG	BAR	PSIG	BAR		
BORE SIZES 0.187" TO 0.375" (1/8" PIPE) – MODEL PG4																									
PG4 with Optional 1/4 NPT																									
PG4(PTM2)-187	0.187	4.75	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,500	103	1,500	103	2,400	165	10,000	689	8,000	551					
PG4(PTM2)-236	0.236	5.99	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,500	103	1,500	103	1,600	110	10,000	689	7,500	517					
PG4(PTM2)-250	0.250	6.35	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,500	103	1,500	103	1,600	110	10,000	689	7,500	517					
PG4(PTM2)-312	0.312	7.92	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,200	83	1,200	83	2,000	138	10,000	689	7,000	482					
PG4(PTM2)-375	0.375	9.53	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,200	83	500	34	1,400	96	7,500	517	4,500	310					
PG4 with Optional 3/8 NPT																									
PG4(PTM3)-187	0.187	4.75	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,500	103	1,500	103	2,400	165	10,000	689	8,000	551					
PG4(PTM3)-236	0.236	5.99	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,500	103	1,500	103	1,600	110	10,000	689	7,500	517					
PG4(PTM3)-250	0.250	6.35	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,500	103	1,500	103	1,600	110	10,000	689	7,500	517					
PG4(PTM3)-312	0.312	7.92	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,200	83	1,200	83	2,000	138	10,000	689	7,000	482					
PG4(PTM3)-375	0.375	9.53	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,200	83	500	34	1,400	96	7,500	517	4,500	310					
PG4 with Optional 3/4 NPT																									
PG4(PTM5)-187	0.187	4.75	2.56	65.0	3.31	84.1	1.250	1.000	31.8	25.4	1,500	103	1,500	103	2,400	165	10,000	689	8,000	551					
PG4(PTM5)-236	0.236	5.99	2.56	65.0	3.31	84.1	1.250	1.000	31.8	25.4	1,500	103	1,500	103	1,600	110	10,000	689	7,500	517					
PG4(PTM5)-250	0.250	6.35	2.56	65.0	3.31	84.1	1.250	1.000	31.8	25.4	1,500	103	1,500	103	1,600	110	10,000	689	7,500	517					
PG4(PTM5)-312	0.312	7.92	2.56	65.0	3.31	84.1	1.250	1.000	31.8	25.4	1,200	83	1,200	83	2,000	138	10,000	689	7,000	482					
PG4(PTM5)-375	0.375	9.53	2.56	65.0	3.31	84.1	1.250	1.000	31.8	25.4	1,200	83	500	34	1,400	96	7,500	517	4,500	310					
Weld Neck Mount (Weld Neck Length 0.78", Diameter 0.84")**																									
PG4(SWM4/S316L)-BLANK	NA	NA	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
PG4(SWM4/S316L)-187	0.187	4.75	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,500	103	1,500	103	2,400	165	10,000	689	8,000	551					
PG4(SWM4/S316L)-236	0.236	5.99	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,500	103	1,500	103	1,600	110	10,000	689	7,500	517					
PG4(SWM4/S316L)-250	0.250	6.35	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,500	103	1,500	103	1,600	110	10,000	689	7,500	517					
PG4(SWM4/S316L)-312	0.312	7.92	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,200	83	1,200	83	2,000	138	10,000	689	7,000	482					
PG4(SWM4/S316L)-375	0.375	9.53	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,200	83	500	34	1,400	96	7,500	517	4,500	310					
PG4(SWM4/S316L)-12P	0.405	10.29	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F
SAE 1/2-20 Thread Mount (formerly MS)																									
PG4(MSE5)-BLANK	NA	NA	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
PG4(MSE5)-187	0.187	4.75	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,500	103	1,500	103	2,400	165	9,138	630	8,000	551					
SAE 9/16-18 Thread Mount (formerly MS)																									
PG4(MSE6)-BLANK	NA	NA	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
PG4(MSE6)-250	0.250	6.35	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,500	103	1,500	103	1,600	110	9,138	630	7,500	517					
SAE 3/4-16 Thread Mount (formerly MS)																									
PG4(MSE8)-BLANK	NA	NA	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
PG4(MSE8)-312	0.312	7.92	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,200	83	1,200	83	2,000	138	9,138	630	7,000	482					
PG4(MSE8)-375	0.375	9.53	2.56	65.0	3.31	84.1	1.000	1.000	25.4	25.4	1,200	83	500	34	1,400	96	7,500	517	4,500	310					

Note: the pressure and torque ratings provided in this catalog apply only when bores are drilled by Conax Technologies.

* Hex size for the body and cap are the same unless a cap size is provided in parentheses. Blanks are provided with no hole in the body, follower and sealant.

** Weld neck models require lubrication prior to use.

N/O = Not Offered, NA = Not Applicable

Datasheet : 101

SINGLE ELEMENT SEALING – SPECIFICATIONS ■ PG SERIES

Catalog Number	Tube/Probe Diameter		Length 'A'		Length 'B'		Hex Size				Pressure Rating										
	IN	MM	IN	MM	IN	MM	Body IN	Cap IN	Body MM	Cap MM	Neoprene		Viton		Teflon		Lava		Grafoil		
BORE SIZES 0.375" TO 0.75" (1/8" TO 3/8" PIPE) - MODEL PG5																					
Standard 3/4 NPT																					
PG5-BLANK	NA	NA	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
PG5-250	0.250	6.35	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	400	28	2,400	165	800	55	2,800	193	1,200	83	
PG5-375	0.375	9.53	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	400	28	2,400	165	800	55	2,800	193	1,200	83	
PG5-12P	0.405	10.29	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F
PG5-500	0.500	12.70	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	800	55	1,200	83	800	55	2,000	138	1,200	83	
PG5-25P	0.540	13.72	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F
PG5-625	0.625	15.88	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	400	28	400	28	800	55	3,600	248	1,200	83	
PG5-37P	0.675	17.15	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F
PG5-750	0.750	19.05	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	400	28	400	28	400	28	2,800	193	1,200	83	
PG5 with Optional 1/2 NPT																					
PG5(P/M4)-250	0.250	6.35	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	400	28	2,400	165	800	55	2,800	193	1,200	83	
PG5(P/M4)-375	0.375	9.53	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	400	28	2,400	165	800	55	2,800	193	1,200	83	
PG5(P/M4)-500	0.500	12.70	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	800	55	1,200	83	800	55	2,000	138	1,200	83	
PG5(P/M4)-625	0.625	15.88	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	400	28	400	28	800	55	3,600	248	1,200	83	
PG5 with Optional 1 NPT																					
PG5(P/M6)-250	0.250	6.35	3.12	79.2	3.87	98.3	1.500	1.500	38.1	38.1	400	28	2,400	165	800	55	2,800	193	1,200	83	
PG5(P/M6)-375	0.375	9.53	3.12	79.2	3.87	98.3	1.500	1.500	38.1	38.1	400	28	2,400	165	800	55	2,800	193	1,200	83	
PG5(P/M6)-500	0.500	12.70	3.12	79.2	3.87	98.3	1.500	1.500	38.1	38.1	800	55	1,200	83	800	55	2,000	138	1,200	83	
PG5(P/M6)-625	0.625	15.88	3.12	79.2	3.87	98.3	1.500	1.500	38.1	38.1	400	28	400	28	800	55	3,600	248	1,200	83	
PG5(P/M6)-750	0.750	19.05	3.12	79.2	3.87	98.3	1.500	1.500	38.1	38.1	400	28	400	28	400	28	2,800	193	1,200	83	
Weld Neck Mount (Weld Neck Length 0.79", Diameter 1.050")**																					
PG5(S/WMS/S316L)-BLANK	NA	NA	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
PG5(S/WMS/S316L)-250	0.250	6.35	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	400	28	2,400	165	800	55	2,800	193	1,200	83	
PG5(S/WMS/S316L)-375	0.375	9.53	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	400	28	2,400	165	800	55	2,800	193	1,200	83	
PG5(S/WMS/S316L)-12P	0.405	10.29	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F
PG5(S/WMS/S316L)-500	0.500	12.70	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	800	55	1,200	83	800	55	2,000	138	1,200	83	
PG5(S/WMS/S316L)-25P	0.540	13.72	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F
PG5(S/WMS/S316L)-625	0.625	15.88	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	400	28	400	28	800	55	3,600	248	1,200	83	
PG5(S/WMS/S316L)-37P	0.675	17.15	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F	C/F
PG5(S/WMS/S316L)-750	0.750	19.05	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	400	28	400	28	400	28	2,800	193	1,200	83	
SAE 9/16 -18 Thread Mount (formerly MS)																					
PG5(MSE6)-BLANK	NA	NA	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
PG5(MSE6)-250	0.250	6.35	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	400	28	2,400	165	800	55	2,800	193	1,200	83	
SAE 3/4 -16 Thread Mount (formerly MS)																					
PG5(MSE8)-BLANK	NA	NA	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
PG5(MSE8)-375	0.375	9.53	2.88	73.0	3.63	92.1	1.250	1.500	31.8	38.1	400	28	2,400	165	800	55	2,800	193	1,200	83	
SAE 1-1/16 -12 Thread Mount (formerly MS)																					
PG5(MSE12)-BLANK	NA	NA	2.88	73.0	3.63	92.1	1.375	1.500	34.9	38.1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
PG5(MSE12)-500	0.500	12.70	2.88	73.0	3.63	92.1	1.375	1.500	34.9	38.1	800	55	1,200	83	800	55	2,000	138	1,200	83	
SAE 1-5/16 -12 Thread Mount (formerly MS)																					
PG5(MSE16)-BLANK	NA	NA	2.88	73.0	3.63	92.1	1.625	1.500	41.3	38.1	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
PG5(MSE16)-625	0.625	15.88	2.88	73.0	3.63	92.1	1.625	1.500	41.3	38.1	400	28	400	28	800	55	3,600	248	1,200	83	
PG5(MSE16)-750	0.750	19.05	2.88	73.0	3.63	92.1	1.625	1.500	41.3	38.1	400	28	400	28	400	28	2,800	193	1,200	83	

C/F = Consult factory. NA = Not Applicable

All pressure and torque ratings were determined at 68° F (20° C) using stainless steel rod as the element. Pressure ratings may degrade at higher temperatures. Pressure rating guide values are provided for glands with elements restrained by the compressed sealant. Higher pressure may be attained with additional element restraints. Tolerance of tube or probe diameter is ±0.005. Deviation from the nominal may affect pressure ratings. Standard O.D. tolerance of pipe is +0.015"/-0.031". Consult factory for details.

CAUTION: When sealing on soft, fragile or crushable elements, catalog torques may not apply. When catalog torques are applied, compressed sealants generate considerable forces on the element to be sealed. These forces could result in damaging soft or fragile elements such as coax cables or thin-wall materials. Consult factory for these types of applications.

Datasheet : 101

PG SERIES ■ SINGLE ELEMENT SEALING – LARGE BORE SIZES



Hex Style



Flange Style

Conax Technologies Large Bore PG Glands were designed to seal on pipe, tubes or probes with diameters of 0.750" or greater. Originally designed for applications such as liquid or gas sampling, coupon insertion and securing of commercial pipe, these glands generally operate at lower pressures than other PG glands. Their larger size and rugged design make them ideal for heavy duty industrial applications.

Model PG6 maintains the traditional hex style design. Model PG7 and up feature a flange cap design that provides ease of assembly and reduces the torque requirements that would be encountered with a hex design of that size. Threaded gland bodies, caps and followers are constructed from 303SST standard. Bodies constructed of 316LSST are standard for the weld neck models and available as an option on threaded glands.

Cap Style A offers a mounting thread only. Cap Style B provides threading on both ends for attachment to conduit or terminal heads.


As always, custom materials, bore sizes and optional mounting configurations are available. Please consult a Conax Technologies' sales engineer for custom needs.

Accessories

The replaceable sealant permits repeated use of the same fitting. Assembly is simple and may be done in the field. Simply insert the element and torque the cap or cap screws. Large bore glands are offered with Viton, Teflon, Lava and Grafoil sealants. The Viton and Teflon sealants may be reused when the gland is loosened and retorqued. Grafoil offers limited reusability. Due to its composition, Lava is not reusable in these applications.

Glands are supplied factory lubricated. When reused, the glands should be relubricated to maintain the published torque and pressure ratings. If glands are cleaned prior to assembly, they should be relubricated. On weld mount models, the heat from the welding process will destroy the lubricant. These models must also be relubricated prior to use. See page 103 for information on our lubrication kit.


Catalog Numbering System

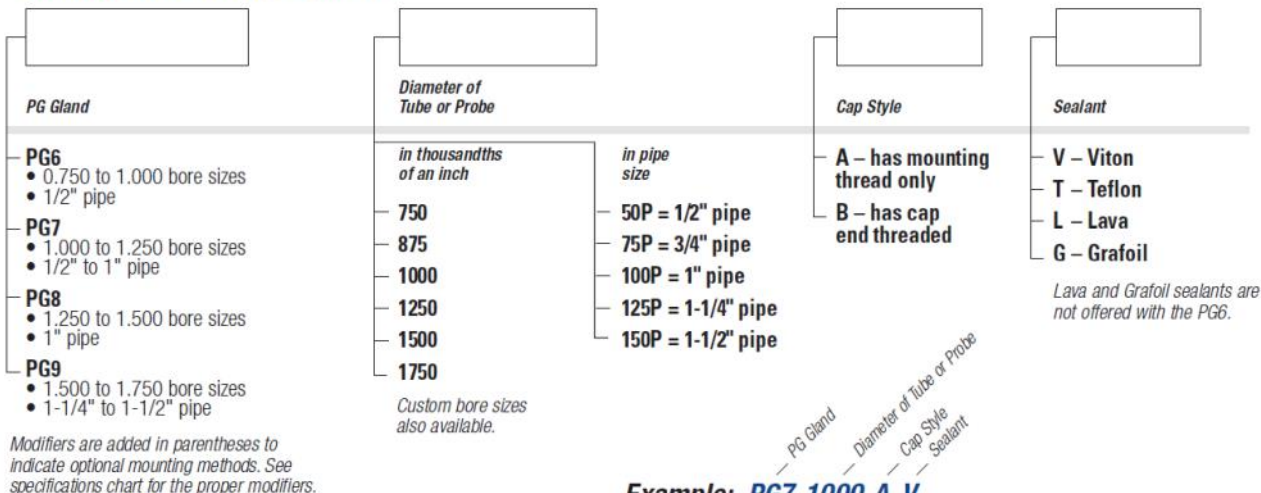

Datasheet : 101

Hex Style


Catalog Number	Tube/Probe Diameter		Length 'A'		Length 'B'		Hex Size				Pressure Rating							
	IN	MM	IN	MM	IN	MM	Body IN	Cap IN	Body MM	Cap MM	Viton PSIG	Teflon BAR	Lava PSIG	Grafoil BAR				
MODEL PG6																		
Standard 1 NPT																		
PG6-750	0.750	19.05	3.50	88.9	4.50	114.3	1.750	2.000	44.5	50.8	1,000	69	400	28	NA	NA	NA	NA
PG6-50P	0.840	21.34	3.50	88.9	4.50	114.3	1.750	2.000	44.5	50.8	1,000	69	400	28	NA	NA	NA	NA
PG6-875	0.875	22.23	3.50	88.9	4.50	114.3	1.750	2.000	44.5	50.8	1,000	69	400	28	NA	NA	NA	NA
PG6-1000	1.000	25.40	3.50	88.9	4.50	114.3	1.750	2.000	44.5	50.8	1,000	69	400	28	NA	NA	NA	NA
Weld Neck Mount (Weld Neck Length 0.98", Diameter 1.315")**																		
PG6(SWM6/S316L)-750	0.750	19.05	3.50	88.9	4.50	114.3	1.750	2.000	44.5	50.8	1,000	69	400	28	NA	NA	NA	NA
PG6(SWM6/S316L)-50P	0.840	21.34	3.50	88.9	4.50	114.3	1.750	2.000	44.5	50.8	1,000	69	400	28	NA	NA	NA	NA
PG6(SWM6/S316L)-875	0.875	22.23	3.50	88.9	4.50	114.3	1.750	2.000	44.5	50.8	1,000	69	400	28	NA	NA	NA	NA
PG6(SWM6/S316L)-1000	1.000	25.40	3.50	88.9	4.50	114.3	1.750	2.000	44.5	50.8	1,000	69	400	28	NA	NA	NA	NA




Standard NPT

Flange Style


Catalog Number	Tube/Probe Diameter		Length 'A'		Length 'B'		Flange/Body Diameter		Pressure Rating							
	IN	MM	IN	MM	IN	MM	IN	MM	Viton PSIG	Teflon BAR	Lava PSIG	Grafoil BAR				
MODEL PG7																
Standard 1-1/4 NPT																
PG7-50P	0.840	21.34	3.75	95.3	5.00	127.0	3.000	76.2	1,000	69	C/F	C/F	500	34	750	52
PG7-1000	1.000	25.40	3.75	95.3	5.00	127.0	3.000	76.2	1,000	69	C/F	C/F	500	34	750	52
PG7-75P	1.050	26.67	3.75	95.3	NA	NA	3.000	76.2	1,000	69	C/F	C/F	500	34	750	52
PG7-1250	1.250	31.75	3.75	95.3	NA	NA	3.000	76.2	1,000	69	C/F	C/F	500	34	750	52
PG7-100P	1.315	33.40	3.75	95.3	NA	NA	3.000	76.2	1,000	69	C/F	C/F	500	34	750	52
Weld Neck Mount (Weld Neck Length 1.01", Diameter 1.660")**																
PG7(SWM7/S316L)-50P	0.840	21.34	3.75	95.3	5.00	127.0	3.000	76.2	1,000	69	C/F	C/F	500	34	750	52
PG7(SWM7/S316L)-1000	1.000	25.40	3.75	95.3	5.00	127.0	3.000	76.2	1,000	69	C/F	C/F	500	34	750	52
PG7(SWM7/S316L)-75P	1.050	26.67	3.75	95.3	NA	NA	3.000	76.2	1,000	69	C/F	C/F	500	34	750	52
PG7(SWM7/S316L)-1250	1.250	31.75	3.75	95.3	NA	NA	3.000	76.2	1,000	69	C/F	C/F	500	34	750	52
PG7(SWM7/S316L)-100P	1.315	33.40	3.75	95.3	NA	NA	3.000	76.2	1,000	69	C/F	C/F	500	34	750	52
MODEL PG8																
Standard 1-1/2 NPT																
PG8-1250	1.250	31.75	4.25	108.0	NA	NA	4.000	101.6								
PG8-100P	1.315	33.40	4.25	108.0	NA	NA	4.000	101.6								
PG8-1500	1.500	38.10	4.25	108.0	NA	NA	4.000	101.6								
Weld Neck Mount (Weld Neck Length 1.03", Diameter 1.900")**																
PG8(SWM8/S316L)-1250	1.250	31.75	4.25	108.0	NA	NA	4.000	101.6								
PG8(SWM8/S316L)-100P	1.315	33.40	4.25	108.0	NA	NA	4.000	101.6								
PG8(SWM8/S316L)-1500	1.500	38.10	4.25	108.0	NA	NA	4.000	101.6								
MODEL PG9																
Standard 2 NPT																
PG9-1500	1.500	38.10	5.06	128.6	NA	NA	5.000	127.0								
PG9-125P	1.660	42.16	5.06	128.6	NA	NA	5.000	127.0								
PG9-1750	1.750	44.45	5.06	128.6	NA	NA	5.000	127.0								
PG9-150P	1.900	48.26	5.06	128.6	NA	NA	5.000	127.0								
Weld Neck Mount (Weld Neck Length 1.06", Diameter 2.375")**																
PG9(SWM9/S316L)-1500	1.500	38.10	5.06	128.6	NA	NA	5.000	127.0								
PG9(SWM9/S316L)-125P	1.660	42.16	5.06	128.6	NA	NA	5.000	127.0								
PG9(SWM9/S316L)-1750	1.750	44.45	5.06	128.6	NA	NA	5.000	127.0								
PG9(SWM9/S316L)-150P	1.900	48.26	5.06	128.6	NA	NA	5.000	127.0								



Weld Neck Mount



Flange Style NPT



Flange Style
Weld Neck Mount

Pressure ratings on large bore models may be influenced by numerous factors and are therefore application specific. Please consult the factory for details.

Note: the pressure and torque ratings provided in this catalog apply only when bores are drilled by Conax Technologies.

* Hex size for the body and cap are the same unless a cap size is provided in parentheses.

** Weld neck models require lubrication prior to use.

N/O = Not Offered. C/F = Consult factory. NA = Not Available.

All pressure and torque ratings were determined at 68° F (20° C) using stainless steel rod as the element. Pressure ratings may degrade at higher temperatures. Pressure rating guide values are provided for glands with elements restrained by the compressed sealant. Higher pressure may be attained with additional element restraints. Tolerance of tube or probe diameter is ±0.005. Deviation from the nominal may affect pressure ratings. Standard O.D. tolerance of pipe is +0.015"/-0.031". Consult factory for details.

For proper assembly of these sealing glands, see the Assembly Instructions provided on pages 106-119.